


TSS_CDU_01(06)
Chain Drive Unit Product List
Imperial

The T2 range offers options for both helical in-line and worm applications.


The table below outlines the product offerings for the T2 drive unit range. If a motor model you need is not on this list but is on the V2 product list, it can be made to order.

Motor no	Type	Power (HP)	Peak Amps (A) (60 Hz, 380 V)	Line Speed (ft/min) (60 Hz)	Line Speed (ft/min) (60 Hz)
T2 CDU_3	Worm	1.0	1.67	40	60
T2 CDU_5	Worm	1.5	2.36	60	80
T2 CDU_6	Worm	1.5	2.36	80	100
T2 CDU_7	Worm	1.5	2.36	100	120
T2 CDU_8	Worm	1.5	2.36	120	152
T2 CDU_9	Worm	2.0	3.05	60	80
T2 CDU_10	Worm	2.0	3.05	80	100
T2 CDU_11	Worm	2.0	3.05	100	120
T2 CDU_12	Worm	2.0	3.05	120	152
T2 CDU_13	Worm	2.0	3.05	60	80
T2 CDU_14	Worm	3.0	4.22	80	100
T2 CDU_15	Worm	3.0	4.22	100	120
T2 CDU_16	Worm	3.0	4.22	120	152
T2 CDU_19	Helical inline	1.0	1.67	40	60
T2 CDU_21	Helical inline	1.5	2.36	60	80
T2 CDU_22	Helical inline	1.5	2.36	80	100
T2 CDU_24	Helical inline	1.5	2.36	120	152
T2 CDU_28	Helical inline	2.0	3.05	120	152
T2 CDU_32	Helical inline	3.0	4.22	120	152

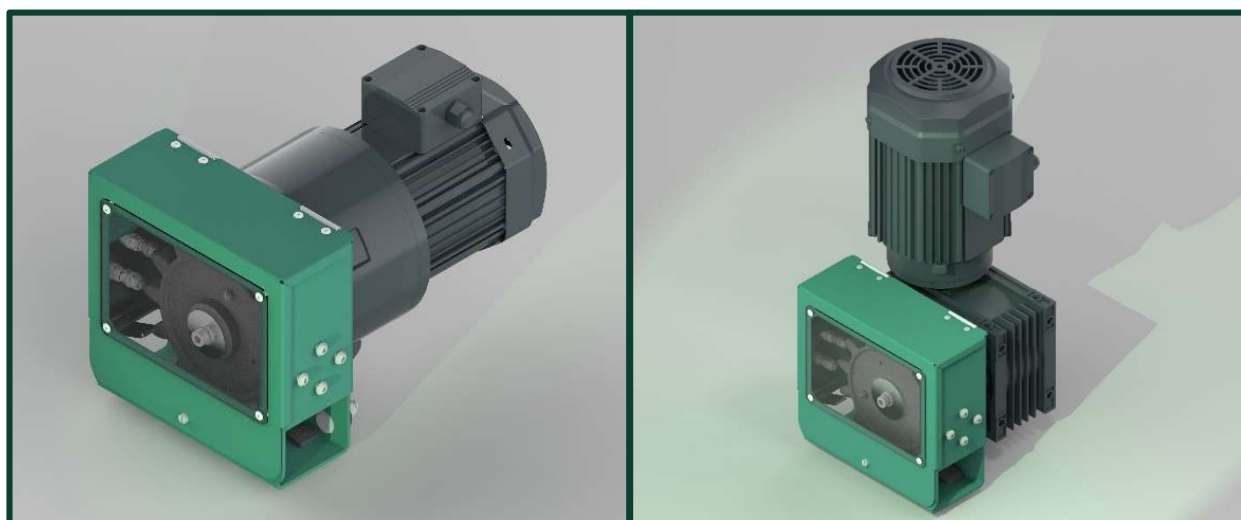


The table below outlines the product offerings for the V2 drive unit range. The V2 drive units are not offered in worm applications.

Motor no	Type	Power (HP)	Peak Amps (A) (60 Hz, 380 V)	Line Speed (ft/min) (50 Hz)	Line Speed (ft/min) (60 Hz)
V2 CDU_19	Helical inline	1.0	1.63	40	60
V2 CDU_20	Helical inline	1.0	1.63	110	130
V2 CDU_21	Helical inline	1.5	2.39	40	60
V2 CDU_22	Helical inline	1.5	2.39	60	80
V2 CDU_23	Helical inline	1.5	2.39	100	120
V2 CDU_24	Helical inline	1.5	2.39	120	152
V2 CDU_25	Helical inline	2.0	3.27	40	60
V2 CDU_26	Helical inline	2.0	3.27	80	100
V2 CDU_27	Helical inline	2.0	3.27	100	120
V2 CDU_28	Helical inline	2.0	3.27	120	152
V2 CDU_29	Helical inline	3.0	4.79	60	80
V2 CDU_30	Helical inline	3.0	4.79	80	100
V2 CDU_31	Helical inline	3.0	4.79	100	120
V2 CDU_32	Helical inline	3.0	4.79	120	152

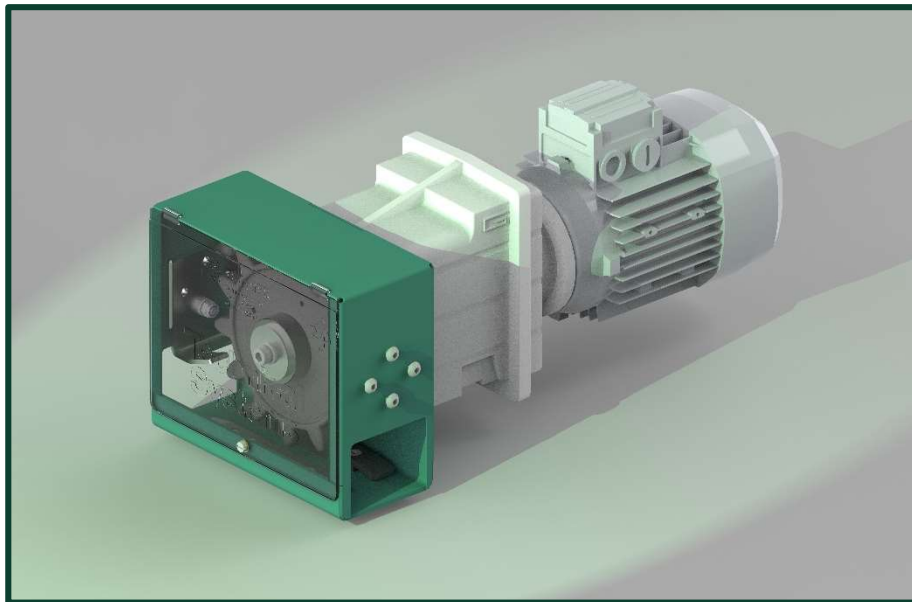

Optional Extras

The units as listed above do not come standard with legs or motor mounts. The optional extras available are listed below.

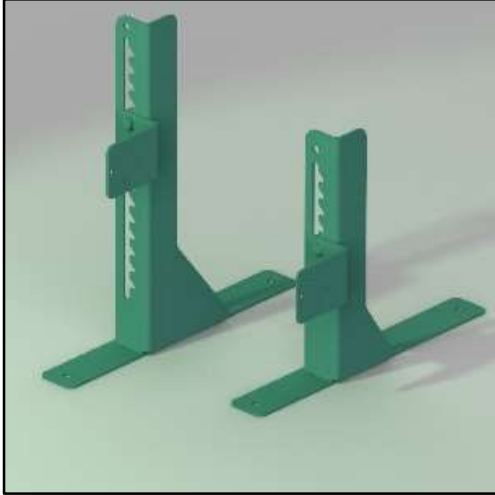


Legs

Height range:

Standard: 0.47 in – 6.10 in

Extended: 0.47 in – 12.40 in

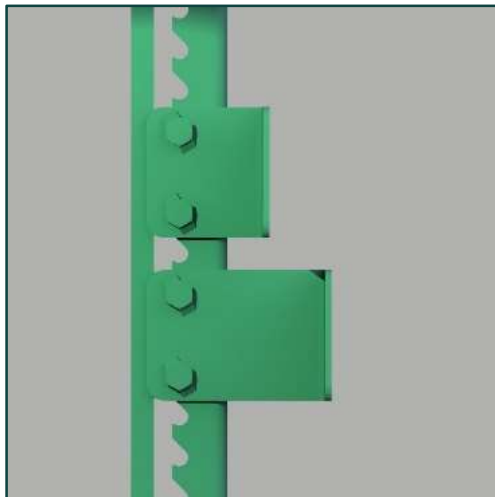


Housing Mounts

Motor mounts come standard with the leg assembly and are offered in two various widths.

Widths:

Standard: Used for helical in-line gearmotor options

Extended: Used for worm gearmotor applications

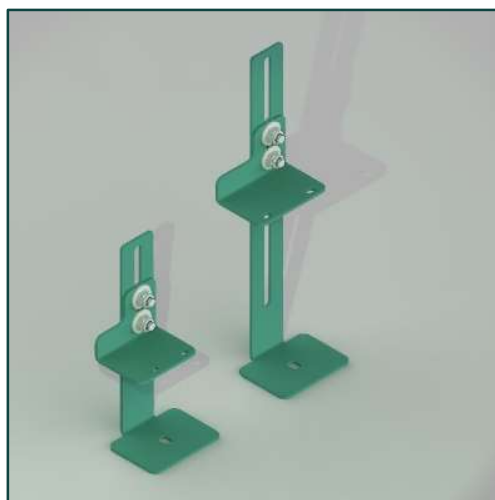

Motor mounts are only available for the V2 Drive Units.

Size:

- 1.0 HP & 1.5 HP motors
 - Not recommended
- 2.0 HP & 3.0 HP motors
 - Recommended

Height range:

Standard: For use with Standard height legs

Extended: For use with extended height legs

Customizations:

Please contact the Technical Systems sales team for further information on any of the available customizations.



Narrow Configuration:

All T2 Drive Units are offered in a narrow configuration to accommodate P-Type feeder chain systems.

<u>General Options</u> Custom-made items or appearance	Includes specific leg stand brackets, unit colour and custom covers with customer specific logos.
<u>Electrical Options</u> Variations for voltage and phase.	Single-phase versions, various voltage configurations, and frequency inputs of 50 Hz or 60 Hz are possible.

Copyright subsists in this document. Any unauthorised performance of restricted acts (as defined in the Copyright Act, 98 of 1978) in respect of this document, including reproduction, publication or adaptation thereof, constitutes infringement of the copyright and may be liable to civil and/or criminal prosecution.